




## New Product Announcement

www.noisewave.com  
Email: info@noisewave.com  
Phone: (973) 386-1119  
Fax: (973) 386-1131

### NoiseWave Announces the NW3G-CS Coaxial Noise Source

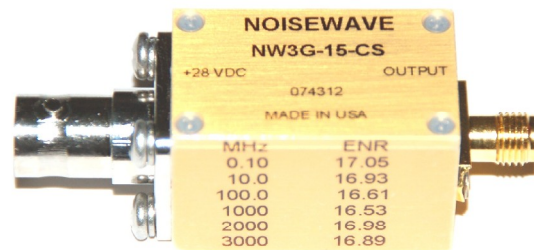

NoiseWave announces the immediate availability of the new NoiseWave NW3G-CS coaxial noise source. Available in 15 and 30 dB ENRs (Excess Noise Ratios), the NW3G-CS is ideal for noise figure measurements and built in test applications. The unit features a small profile housing of 0.75 by 0.5 by 1.25 inches excluding connectors, ideal when space is at a premium.

The unit features typical flatness of +/- 0.50 dB over the entire frequency range 10 kHz to 3 GHz and comes with calibrated cardinal ENR frequencies. This superior flatness helps to reduce measurement uncertainty in broadband applications. The NW3G-CS is available with a variety of input and output connectors. Standard operation is from +28 Vdc with a 20 mA maximum current draw.

The NW3G-CS is economically priced and delivery is typically from stock. Alternative voltages, output levels and frequencies are also available.

Applications for the NoiseWave NW3G-CS include built in test equipment, Noise Figure testing, wireless test equipment, jamming and as an economical source for broadband power.

Experience the new wave in Noise and let us deliver your Noise solution! Contact NoiseWave today at (973) 386-1119 or info@noisewave.com to learn more about how our products may fit your design needs.